


Universal wire connector
3 numbers of connection, 1 potential
Contact opening function


Material: Housing: PC
 Cover: PC
 Contact parts: Copper
 Spring: Stainless steel

Marking: without


- A number of wire cross sections can be combined in one connector
- High pull-out forces
- Connection of rigid wires without activating the release lever
- Viewing window for visual inspection of the clamping points means greater safety during installation
- Easy handling
- Gauge for ideal wire stripping length

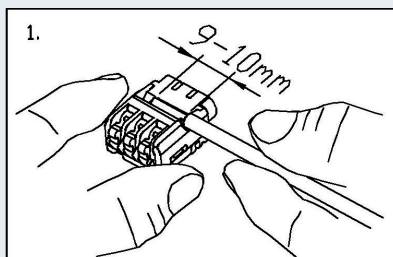


Gauge for stripping length

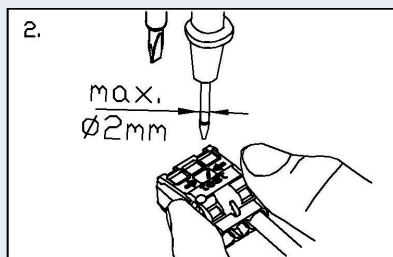

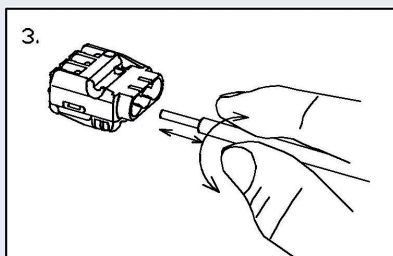

Testing

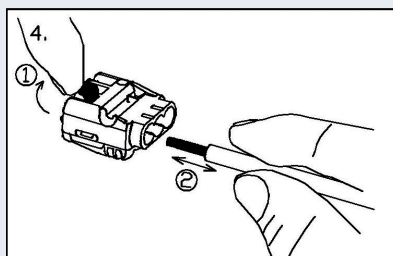

Connection of rigid conductors: direct insertion
 Release of rigid conductors by twisting and pulling



Connection and disconnection of flexible conductors by pushing the release lever

Technical details 46.810.1002-0		
	IEC ratings	UL ratings
Nominal voltage	450 V	300 V
Nominal current	24 A	
Clamping range	0,2 – 2,5 mm ²	AWG 24 - 18
Wire types	solid, stranded and flexible	
Wire stripping length	9 - 10 mm	
T-Marking	T85	T105
Application temperature	-5 up to +45° C	
Humidity	5 - 95%	
Classification	3K5	
IP protection class	IP20	
Product standard	EN 60998-1 EN 60998-2-2	UL 486C
Approval marks:		

Packaging data 46.810.1002-0	
Weight per piece	2,7 g
Packaging unit inner box	75 pcs
Carton dimensions (LxBxH)	96,5 x 96,5 x 51 mm
Weight inner carton	0,223 kg
Number of inner cartons	20 pcs
Total number of pieces	1.500 pcs
Carton dimensions outer box (LxBxH)	297 x 207 x 214 mm
Total weight	4,619 kg
Packaging unit (big) loose	3.000 pcs
Carton dimensions (LxWxH)	375 x 280 x 144 mm
Total weight	8,275 kg