

Height	8.4 mm
Width	40 mm
Length	563.2 mm
Type of fixing	Push-in fixing into luminaire metal sheet or aluminium profile
LED Module	Philips Fortimo LED Strip OC
Pitch distance	11.66 mm
Material	PC
Colour	clear
Surface outside	Micro structure
Light distribution	wide
Beam angle (FWHM)	89° (Philips Fortimo LED Strip OC)
Optical efficiency	96.3 % (Philips Fortimo LED Strip OC)
UGR @ 1600 lm, 2 feet (crosswise)	≤ 20
Operating temperature	max. 110 °C

The presented information are for reference only. All lighting parameters are typical values. The light distribution depends on the used Type of LEDe, position tolerance, chip size and used colour.

## Pitch dependent 1R linear single lens optics

Very flat single lens optics with micro structure surface Material: PC

## 1-Click push-in fixing into luminaire metal sheet or aluminium profile

for metal sheets: 0.5 - 1.0 mm

- Centering pins for mounting and optimal alignment of optics and LED module
- · Centering pins also for anti-twist protection
- Spacers for correct positioning and alignment of LED module to the lens
- Key and slot system for a gapless assembly of the optics
- Only one end cap for both ends


Suitable for Philips Fortimo LED Strip OC LED modules from 280 mm (1ft) to 560 mm (2ft) or comparable LED modules

## Area of application:

For use in linear- and panel lights Office: Work place lighting and corridor lighting Shop: General lighting and corridor lighting Industry: Park stores, department stores and warehouses Public Areas: Corridors and stairways

- Improved visibility and contrast of the illuminated areas Good and uniform light distribution
- Reduced glare


pkg. wt. part no. 85.1 g **35.348.**1013.85 42

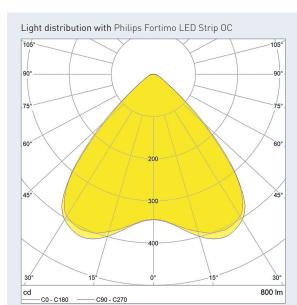

Light distribution: Breitstrahlend 89° measured with Philips Fortimo LED Strip OC

Efficiency: 96.3%



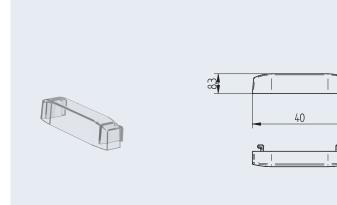




for use with single row optics **35.348**.1012 and 1013.85 **35.324**.1001 - 1005.85 **35.324**.1006 and 1007.85

Slide in fixing

- Only 1 end cap for both sidesSuitable for all LED module thicknesses
- Applying of customised logos possible
  Material: PC

pkg. 450 part no. **35.903.**-304.85 2 g

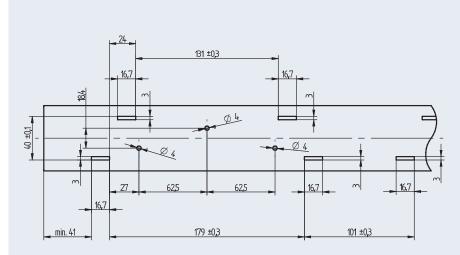

Cut-out metal sheet

