




pkg. wt. part no.
504 5g 47.319.2394.50

Spotlight connector for COB-LEDs.
Suitable for the following COB types

Manufacturer Nichia
COB-Type NFCLJ108B-V1M7

Screw fixing
Housing: PBT
Contacts: CuSn
Rating: 3A / 60 V DC

- With integrated reflector interface
- Easy handling due to pre-assembly of the COB by fixing arms
- Screw fixing: for screws M3 and locking washer
- Max. torque for screw fixing 0.5 Nm
- Strip length: 7-1 mm
- Polarity symbols of connector and COB must be observed in assembly
- Specification of COB manufacturer must be observed
- If COBs are connected in series, the creepage distances and clearances of the individual modules must be the total voltage of the series connection.
- VDE-Reg. Nr. E289
- cURus: for limited applications

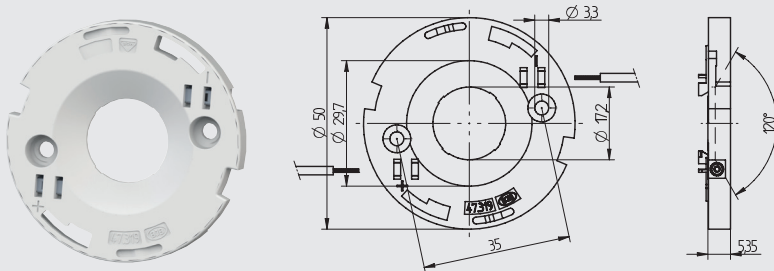

LED-LINE	T 130				CAD	i
			0.25 - 0.5 mm ²	0.5 mm ²		