

General note: It is recommended to make an electrical connection between both poles of each polarity on the solder pad.

SMD-Terminal block Nano with push wire contacts and contact opening function

1 pole - 46.141.2001-0

Direct insertion of solid wires

Contact opening function - for release of already inserted wires

Mounting and wiring position: PCB top side


Machine-compatible "tape-and-reel" packaging

Fixing: Lead-free reflow soldering according to DIN EN 61076-1, section 6


Material: Housing: PPA, white
Contact material: CuNi
Contact surface: hot-dipped tinned

To operate the contact opening function, we recommend the use of our tool 46.141.U801.89

Recommended dimensions for solder tags



Packaging data 46.141.2001-0	
Weight per piece	0.2 g
Pieces per coil	4.050
Coil diameter	381 mm - 15"
Weight per coil	1.07 kg
Number of coils per cardboard	18
Number of SMD terminal blocks per cardboard	72.900
Weight per cardboard	15.4 kg
Cardboard dimensions (LxWxH)	400 x 405 x 415 mm



Accessories:


SMD Nano-B2B connector. For connecting PCBs. Available in 21 mm length.



46.141.U701.50




46.142.U701.50




46.143.U701.50

Contact opening tool

For release of already inserted wires



46.141.U801.89

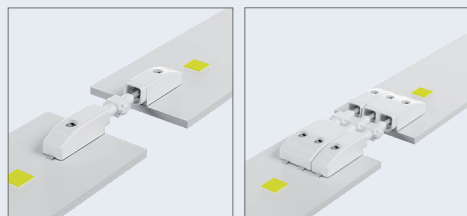

Connection data	
Connection technology	Push wire contacts
Solid wires	0.2 - 0.5 mm ² , AWG 24-20
Strip length	7 ±0.5 mm
Conductor entry angle to the PCB	0
Wire release function by	Contact opening tool

Pull-out force according to DN 60999-1	
0.2 mm ²	min. 10 N
0.34 mm ²	min. 15 N
0.5 mm ²	min. 20 N
0.75 mm ²	min. 30 N
Insertion force	max. 10 N

Geometrical data	
Pin spacing	3 mm / 0.12 inch
Width	3 mm / 0.12 inch
Height	2.7 mm / 0.11 inch
Depth	9.3 mm / 0.37 inch

Material data	
Insulating material group	I
Insulating material	PPA, white
PTI	600
Flammability class, based on UL 94	V-0
Contact material	CuNi
Contact surface	hot-dipped tinned


Mechanical data	
Mounting position	PCB top side
Mounting type	Lead-free reflow soldering

Temperature data	
Marginal temperatures	-40 °C to + 150 °C
Ambient temperature	-40 °C to + 125 °C
T-classification according to IEC 60998-1 para. 12	120° C

Rated data according to IEC / EN 60947-7-4 (IEC/EN 60664-1)	
Rated voltage (III / 3)	63 V
Rated impulse voltage (III / 3)	2.5 kV
Rated voltage (III / 2)	160 V
Rated impulse voltage (III / 2)	2.5 kV
Rated voltage (II / 2)	320 V
Rated impulse voltage (II / 2)	2.5 kV
Rated current	3 A

Rated data according to UL 1977 / CSA-C22.2 No. 182.3	
Rated voltage	600 V
Rated current	USR 9 A, AWG 24 -18 CNR 6 A, AWG 24 -20 CNR 9 A, AWG 18


Country specific certificates	
VDE / ENEC	EN IEC 60947-7-4 File no.: 40040866
cURus	UL 1977 / CSA-C22.2 No. 182.3 File no.: E-365006


Shear forces according to IEC 62137-1-2.	
<p>These values are maximum values that apply only for impuls, not for continuous load.</p> 	
Direction 1 + 2 shear force along	40 N
Direction 3 + 4 shear force across	15 N
Direction 5 pull-off force	15 N

Instructions for soldering process

Suitable for leadfree-reflow-profiles according to DIN EN 61760-1 respective DIN EN 60068-2-58 up to peak-temperature of max. 260°C. Due to different application-specific parameters (component arrangement and alignment, soldering system, solder paste), it is recommended to use test runs to determine a suitable profile under production conditions.

Depending on the SMD soldering process and associated parameters a minor discoloration might occur. However, this will not influence the functionality.

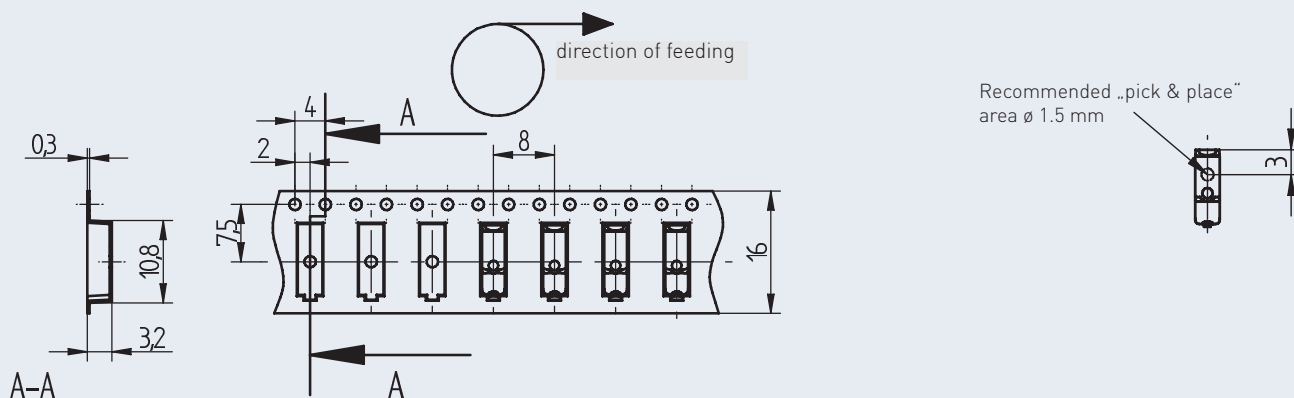

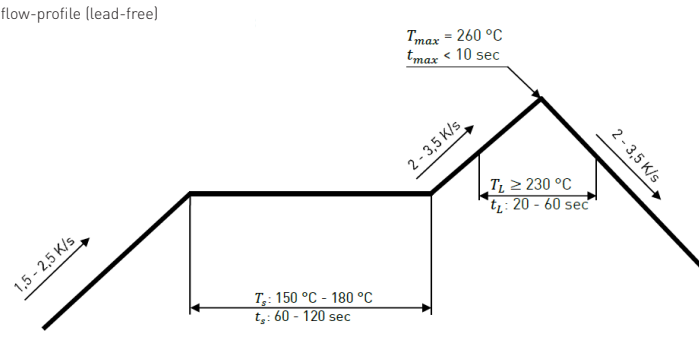Storage time	Solderability up to 6 months when stored between -5°C and +40°C and rel. humidity between 10...60% r H. After a storage time of 6 months, solderability has to be checked according to J-STD-002D or DIN EN 60068-2-58:2016.
max. allowed number of reflow-processes	3
Reflow-profile	<p>Reflow-profile (lead-free)</p> 
Solderability	Solderability of components is checked by wetting test according to J-STD-002D
Assembly method	SMD, according to drawing
Recommended solder stencil thickness	100 - 150 µm (recommendation BJB 150 µm)